

FASTENER FORCE ONE

RESOURCES

THREADED PRODUCTS FOR INDUSTRY




#12-14 Carbon Steel Master Driller with NZF3000 Coating

Material - Carbon Steel

Corrosion Protection - NZF3000 – Zinc and Aluminum Flake Coating
Corrosion Resistance – 3000 hours salt spray life

12-14 SELF-DRILLING

DIMENSIONAL PROPERTIES

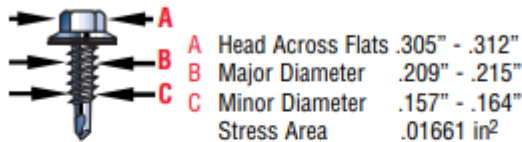

STANDARD MECHANICAL REQUIREMENTS

FOR LELAND AVERAGE VALUES SEE PAGE 23

	Carbon	410	Stainless
Minimum Tensile Strength	3500 lbs.	4300 lbs.	
Minimum Torsional Strength	88 in.-lbs.	130 in.-lbs.	
Minimum Shear Strength	2100 lbs.	2590 lbs.	

PULL-OUT STRENGTH

Expected pull-out strength from lab test per specified test plate thickness (70-85 R_b)


FASTENER FORCE ONE

RESOURCES

THREADED PRODUCTS FOR INDUSTRY




Shear Values for Master Drillers in Carbon Steel Sheet



FASTENER DIAMETER	SELF		GAUGE									
	DRILL POINT	2X26 (.036)	2X24 (.046)	2X22 (.060)	2X20 (.072)	2X18 (.096)	2X16 (.120)	2X14 (.150)	2X12 (.210)	2X1/8 (.250)	2X1/16 (.375)	2X1/4 (.500)
8-18	2	297	499	563	743	1063	1081	/	/	/	/	/
8-18	3	/	/	/	733	1093	1213	1217	/	/	/	/
10-16	2	315	481	592	833	1209	1271	/	/	/	/	/
10-16	3	/	/	/	731	1269	1543	1555	/	/	/	/
10-24	3	/	/	/	754	1211	1557	1697	/	/	/	/
12-14	2	368	603	626	901	1373	1761	2141	/	/	/	/
12-14	3	/	/	/	772	1361	1623	1973	1989	/	/	/
1/4-14	2	514	852	888	1247	1767	/	/	/	/	/	/
1/4-14	3	/	/	/	993	1445	2103	2587	2653	2823	/	/
12-24	4.5	/	/	/	/	/	/	/	2051	2703	/	/
12-24	5	/	/	/	/	/	/	/	/	2703	2723	2765

Pull-out Values (lbs.) for Carbon Steel Master Drillers



SIZE	SELF DRILL		GAUGE									
	POINT		26	24	22	18	16	14	12	1/8	3/16	1/4
8-18	2		122	196	268	494	706	962	1561	/	/	/
8-18	3		123	194	242	473	666	913	1427	2290	/	/
10-16	2		134	217	275	550	787	1036	1656	/	/	/
10-16	3		127	211	269	502	711	970	1477	2080	/	/
10-24	3		124	203	254	498	704	903	1378	2073	2615	/
12-14	2		159	246	292	608	851	1184	1859	2517	3523	/
12-14	3		145	214	286	554	760	1066	1634	2423	3001	/
12-24	4.5		/	/	/	498	700	989	1535	2444	3488	3847
12-24	5		/	/	/	490	702	916	1530	2210	3704	4002
1/4-14	2		169	268	317	648	925	1155	/	/	4696	/
1/4-14	3		144	234	296	613	883	1148	1861	2409	4553	5036
1/4-20	3		143	228	274	559	784	1008	1681	2545	3557	/
1/4-20	4		/	/	/	557	791	1119	1806	2553	4300	4592

FASTENER FORCE ONE

RESOURCES

THREADED PRODUCTS FOR INDUSTRY



FASTENER STRENGTH COMPARISON CHART

STANDARD MECHANICAL REQUIREMENTS				LELAND AVERAGE VALUES			STANDARD MECHANICAL REQUIREMENTS				LELAND AVERAGE VALUES		
FASTENER DIAMETER	MINIMUM TENSILE	MINIMUM TORQUE	MINIMUM SHEAR	LELAND TENSILE	LELAND TORQUE	LELAND SHEAR	FASTENER DIAMETER	MINIMUM TENSILE	MINIMUM TORQUE	MINIMUM SHEAR	LELAND TENSILE	LELAND TORQUE	LELAND SHEAR
8-18	1900 lbs.	48 in. lbs.	1150 lbs.	2433 lbs.	54 in. lbs.	1460 lbs.	14-10	4300 lbs.	156 in. lbs.	2580 lbs.	4966 lbs.	185 in. lbs.	2980 lbs.
10-12	2350 lbs.	65 in. lbs.	1460 lbs.	3300 lbs.	80 in. lbs.	1940 lbs.	14-14	4300 lbs.	156 in. lbs.	2580 lbs.	5700 lbs.	200 in. lbs.	3420 lbs.
10-16	2350 lbs.	65 in. lbs.	1460 lbs.	3133 lbs.	81 in. lbs.	1880 lbs.	1/4-14	4300 lbs.	156 in. lbs.	2580 lbs.	5700 lbs.	200 in. lbs.	3420 lbs.
10-24	2350 lbs.	65 in. lbs.	1500 lbs.	USE MINIMUM STANDARD			1/4-20	4300 lbs.	156 in. lbs.	2580 lbs.	4300 lbs.	156 in. lbs.	2580 lbs.
12-11	3500 lbs.	90 in. lbs.	2100 lbs.	4666 lbs.	125 in. lbs.	2800 lbs.	17-12	5200 lbs.	170 in. lbs.	3120 lbs.	USE MINIMUM STANDARD		
12-14	3500 lbs.	88 in. lbs.	2100 lbs.	4300 lbs.	127 in. lbs.	2580 lbs.	18-9	4550 lbs.	250 in. lbs.	2570 lbs.	4766 lbs.	160 in. lbs.	2860 lbs.
12-24	3700 lbs.	88 in. lbs.	2230 lbs.	4800 lbs.	131 in. lbs.	2880 lbs.							(UNHARDENED PART)